


Desktop Dual-sided Card Printer



S28



Front end

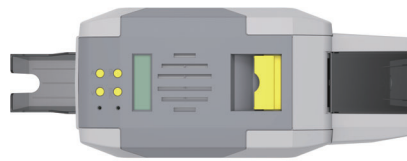

Top end



Back end

Lightweight body, Reliability and Easy-to-Use Consumables

Advanced thermal dye-sublimation printing technology
 Continuous printing of cards and time-saving effort
 Simple operation interface and easy-to-use
 Lightweight and easy to maintain
 Low noise in printing process
 High Printing Speed Engine

Full panel YMCKO ribbon: 100 prints/roll, 300 prints/roll
 Full panel YMCKOK ribbon: 240 prints/roll
 1/2 panel ymckOKO ribbon: 250 prints/roll
 1/2 panel ymckO ribbon: 450 prints/roll
 Monochrome black ribbon: 100mx60mm, 200mx60mm
 Monochrome ribbon(gold/silver/white/red/ blue): 100mx60mm
 KO ribbon: 500 prints/roll
 UV Ultraviolet Security Ribbon: 100m×60mm

Features

Compact and lightweight body
 Support dual-sided printing
 High Definition Color Printing
 Support hand-feeding
 Automatic card-feeding

Multi-functional option module to support various card printing

Dual interface card encoding module
 Contactless ID Card encoding module
 UHF chip card encoding module
 Magnetic stripe card encoding module

SEAOBY S



High quality photo processing by Dye sublimation technology



Come with professional printing software

Technical Parameter

Model	S28 / Desktop Dual-sided Card Printer
Specifications	383 × 174 × 208 (mm), 4.6Kg without output hopper
Interfaces	USB & Ethernet
Input Capacity	100 cards
Output Capacity	50 cards
Print Speed	Monochrome printing: 3~5 s per card(single-sided) / 7~9 s per card(dual-sided); Full-color(YMCKO) printing: 18 s per card(single-sided) / 37 s per card(dual-sided).
Card Material	PVC / Composite PVC / Other material upon request and validation
Power	AC 100~240V, 50/60 Hz, DC 24-25.5V, 2.7 A
Print Dimension	ISO CR80 (53.98mm×85.60mm), edge-to-edge printing
Print Resolution	300dpi × 300dpi, 300dpi × 600dpi, 300dpi × 1200dpi
Memory	128MB
Print Method	Dye sublimation (Direct-to-card)
Card Thickness	0.3-1.05mm
LCM Display	Chinese: 8 characters per line, 2 lines / English: 16 characters per line, 4 lines / Multi-language
Operation System	Driver: Support Windows XP/7/8/10/11, Windows Server 2003/2008/2012/2016, Linux, and NeoKylin, Kylin, UOS and other made-in-China operating system. Development Kit: Support Windows XP/7/8/10/11, Windows Server 2003/2008/2012/2016, Linux, and NeoKylin, Kylin, UOS and other made-in-China Operating System Card Design Software: iCARDE card design software, support Windows XP/7/8/10 operating systems
Warranty	Card printer : 24 months (artificial damage excluded) / Print head: Replace one for free within 1 year (artificial damage excluded)
Operating Condition	1. Regular running temp.: 15°C-30°C(59-86°F), 20%~65% RH non-condensing 2. Lowest / Highest running temp.: 0°C(32°F) / 40°C(104°F), 20%~65% RH non-condensing
Storage Condition	Temp.: -5°C-70°C(23-158°F), 20%~70% RH non-condensing
Certificates	CCC, FCC, CE, ROHS, UKCA

